



Brillante. Shiny.

Incasso LED a parete segnapasso per esterno (IP66/20) applicabile in superfici in muratura e cartongesso con scatola 503. Struttura in pressofusione di alluminio verniciata con polveri poliestere a elevata resistenza ai raggi ultravioletti e alla corrosione; dalla forma squadrata con diffusore in vetro temperato per illuminare e decorare con eleganza ambienti esterni e interni come scale, corridoi, ingressi e zone di passaggio. Cassaforma in dotazione. Alimentatore LED integrato. Disponibile in due finiture (bianco e nero). Disponibili giunti IP68 per connessioni elettriche sicure, durevoli e con barriera anticorrosione.

Outdoor (IP65/20) LED wall recessed luminaire steplight, suitable for stonework and plasterboard walls with 503 box. Die-cast aluminium body painted with polyester powders highly resistant to UV rays and corrosion; square shape with tempered glass diffuser to illuminate and decorate outdoor and indoor environments such as stairs, corridors, entrances and passageways. Recessed box included. Integrated LED driver. Available in two finishes (white and black). IP68 linear connectors for moisture protection and anti-condensation linear joints are available.

GLIMMER




New




GLIMMER

New

OTTICA SIMMETRICA SYMMETRIC OPTICS



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
GLI001XX	3000K-4000K-6000K	320	4,5W	115 x 81 x 50

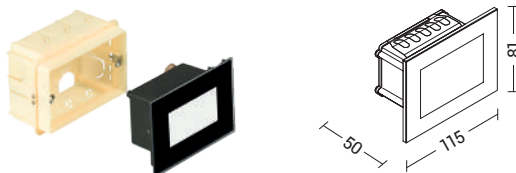


da installare con scatola 503
to be installed with box 503

OTTICA ASIMMETRICA ASYMMETRIC OPTICS



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
GLI001XXAS	3000K-4000K-6000K	320	4,5W	115 x 81 x 50

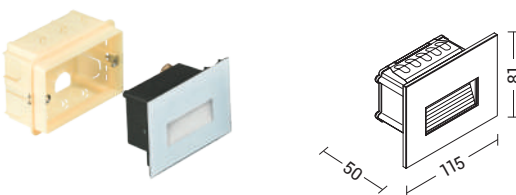

da installare con scatola 503
to be installed with box 503



Switch per temperatura colore (3000K-4000K-6000K)
Colour temperature switch (3000K-4000K-6000K)

3000K 4000K 6000K

Finiture Finishes



B

N

Accessori Accessories



connessione IP68
IP68 connection

p.897